

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
10 July 2003 (10.07.2003)

PCT

(10) International Publication Number
WO 03/056410 A1

(51) International Patent Classification⁷: **G06F 1/16**

(21) International Application Number: PCT/KR02/01430

(22) International Filing Date: 27 July 2002 (27.07.2002)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
2001-85857 27 December 2001 (27.12.2001) KR

(71) Applicant (for all designated States except US): **LG ELECTRONICS, INC.** [KR/KR]; 20, Yoido-dong, Youngdungpo-gu, 150-875 Seoul (KR).

[KR/KR]; 203-1004 Poongrim APT, Hyunggok 1-dong, 730-777 Gumi (KR). **KIM, Hong-Ki** [KR/KR]; 216-402 Hanyang sujung APT, Gawneum-dong, Buk-gu, 702-755 Daegu (KR).

(74) Agent: **HAW, Yong-Noke**; 8th Fl. Songchon Bldg. 642-15 Yoksam-dong, Kangnam-ku, 135-080 Seoul (KR).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZM, ZW.


(72) Inventors; and

(75) Inventors/Applicants (for US only): **LEE, Gang-Hoon**

(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),

[Continued on next page]

(54) Title: **HINGE STRUCTURE FOR FLAT VISUAL DISPLAY DEVICE**

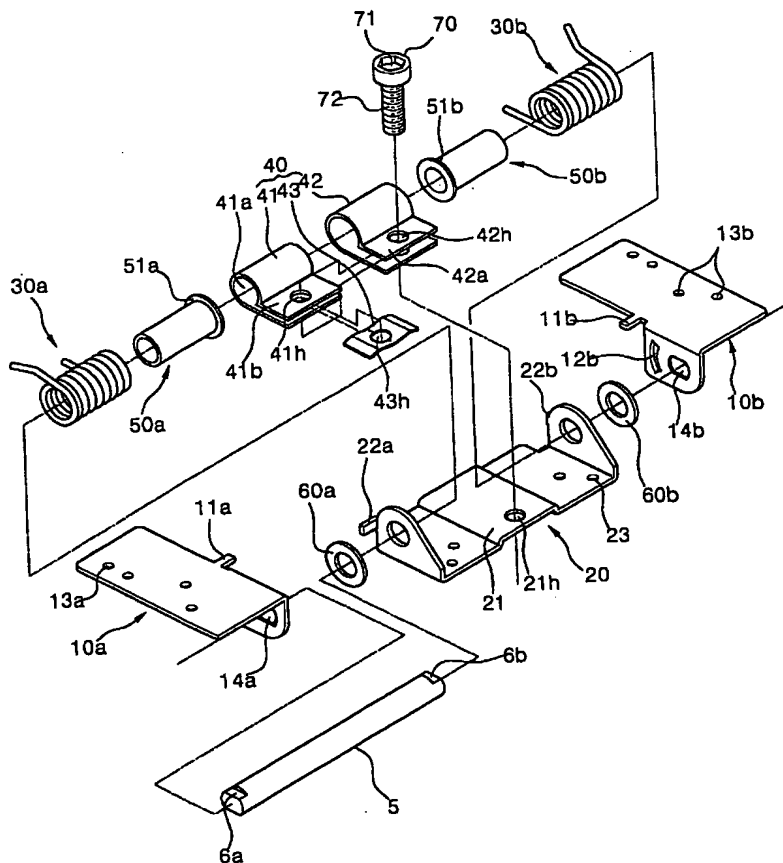

(57) Abstract: A hinge structure for a flat visual display device comprising: a pivotal plate connected to the flat visual display device; a fixing plate connected to a supporting portion for supporting the flat visual display device; a rotational shaft inserted to vertical planes of the pivotal plate and the fixing plate, for rotation of the flat visual display device in one degree of freedom; a frictional member which is formed on an outer periphery of the rotational shaft for enclosing the rotational shaft, and whose both ends have a frictional member tightening plane of a planar shape on which a second inserting hole is formed; and a tightening member inserted to the second inserting hole, for tightening the frictional member tightening plane, thereby tightening the rotational shaft by means of the frictional member, and generating strong breaking force accordingly.

WO 03/056410 A1